


I 2-40 (oil-lubricated)

Voltage	V	100	100	120	200	200	230	230				
Frequency	Hz	50	60	60	50	60	50	60				
Motor	HP kW	1.08 0.80	1.08 0.80	1.08 0.80	0.92 0.68	0.92 0.68	0.92 0.68	0.92 0.68				
Displacement	l/min CFM	100 3.53	120 4.24	120 4.24	100 3.53	120 4.24	100 3.53	120 4.24				
FAD @ 8 bar	l/min CFM	64 2.26	74 2.61	74 2.61	64 2.26	74 2.61	64 2.26	74 2.61				
Max. pressure ¹⁾	bar psi	8 120	8 120	8 120	8 120	8 120	8 120	8 120				
Max. current	A	12.4	12.4	12.4	5.8	5.8	5.8	5.8				
Tank size	litres gallon	40 10.6	40 10.6	40 10.6	40 10.6	40 10.6	40 10.6	40 10.6				
Weight	kg lbs	48 106	48 106	48 106	48 106	48 106	48 106	48 106				
Noise level	dB(A)/1m	48	48	48	48	48	48	48				
Thermal protection		Yes	Yes	Yes	Yes	Yes	Yes	Yes				
Duty cycle		50%	50%	50%	50%	50%	50%	50%				

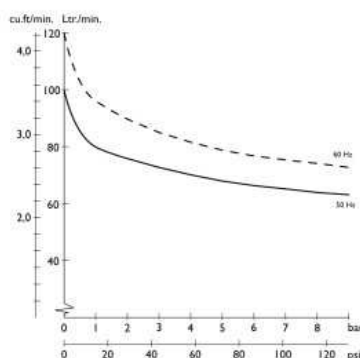

Dimensions (l x w x h)
556 x 446 x 581 mm / 21.8 x 17.5 x 22.8 inch

¹⁾ Higher pressure available upon request

Technical modifications reserved

JUN-AIR®

E-mail: info@jun-air.dk
Internet: www.jun-air.com

